

# CLAIR LIGHTING

PROFESSIONAL

COMMERCIAL

ARCHITECTURE



## LED BLINDER 200

### Product

LED Cell adjustable to the left and right up to 20 degree angle

Variable strobe speeds.

Can be installed via horizontal or vertical way

IP20/IP44 two version optional

High CRI

### Specifications

**Power:** 250W

**Voltage:** 90-250V/50-60Hz

**Lamp:** 2pcs TW Top level Warm White 100W Leds

CRI>90

**Reflector Angle:** 80degrees

**Color Temperature:** 3200-3500K

8-Digital Display

**Channel:** 2/4CHs

**Dimmer:** Smooth dimmer from 0-100%

**Protection Rate:** IP20 Or IP44


**Construction:** Metal housing; Black, white and silver, optional

**Control Mode:** Master/Slave; DM X512 control: auto run

**Size:** 200 x 180 x 400mm

**N.W.:** 8kgs

**G.W. :** 9.5kgs

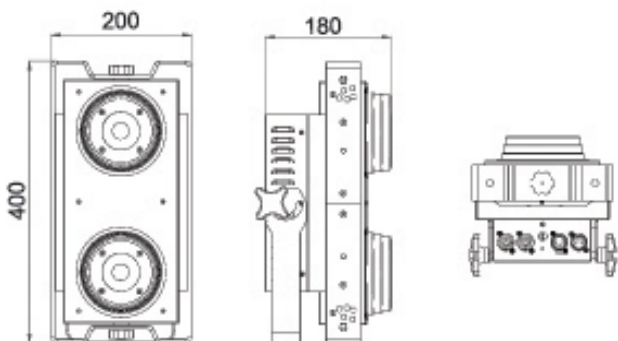

IP veiw : IP20



IP20 display device



IP20 connector



IP20 design

IP veiw : IP44



IP44 design



IP44 display device



IP44 connector